


One Stop purchase service, professional comprehensive solutions.
We can be provide:



Crimping range up to 20".

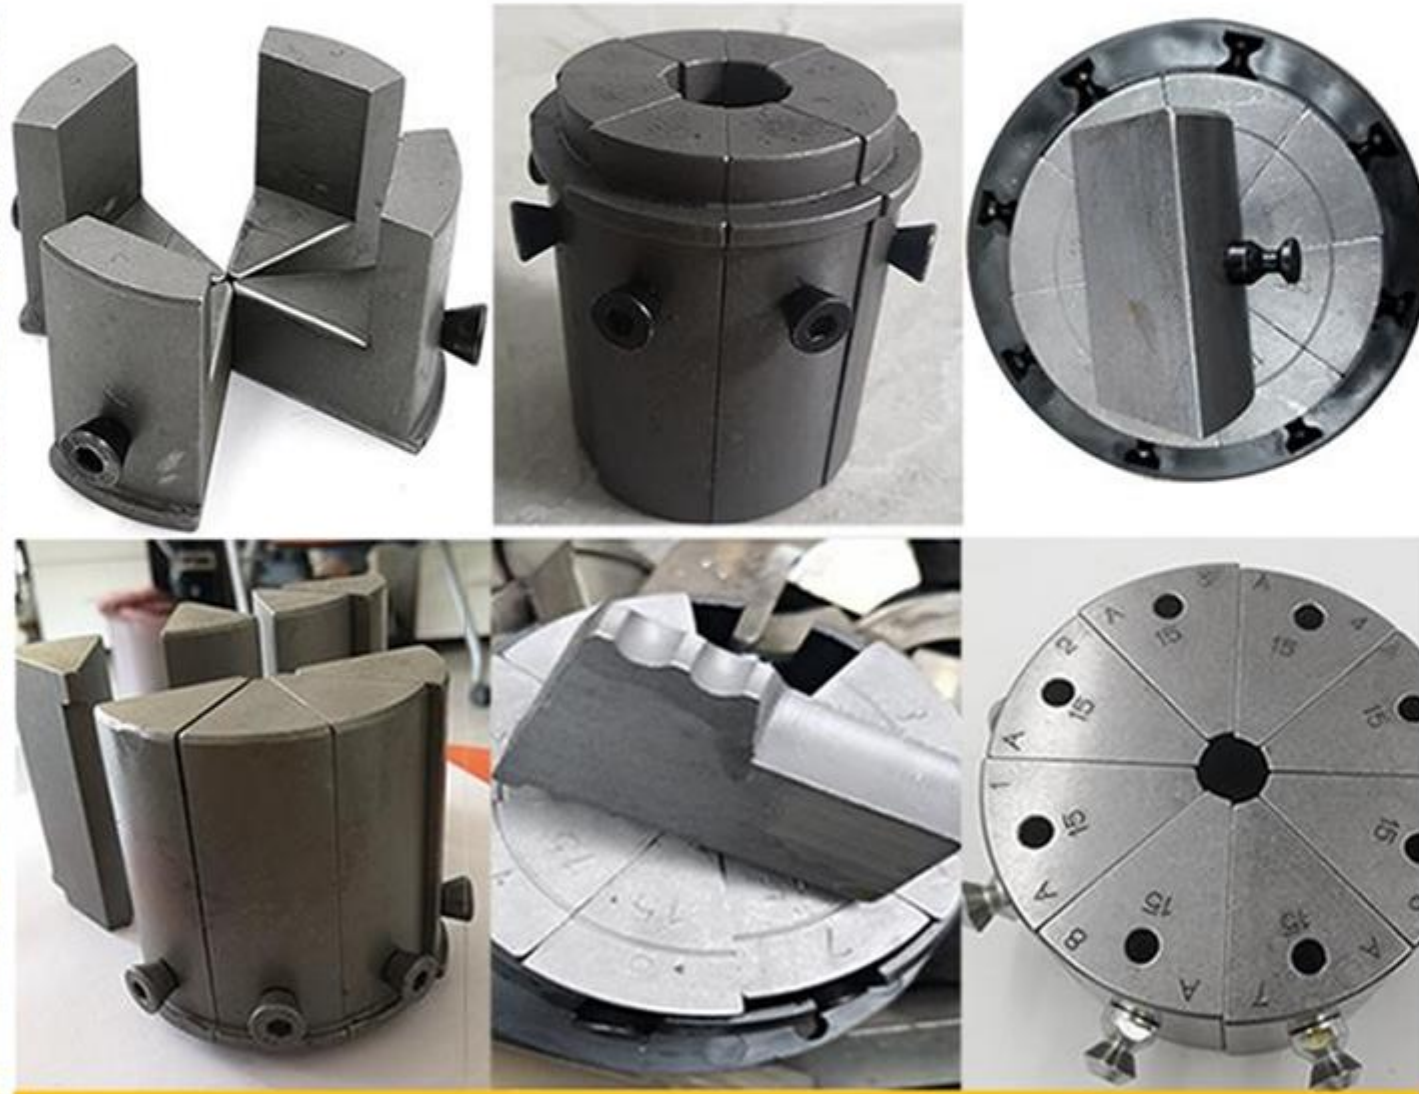

Customize multiple type dies.



Multiple kinds of operating system and type for optional.

OEM.

**Crimping machine, Cutting machine, Skiving machine,
testing pressure machine, Hose assembly machine of all series.**





Electric, 2", 4S

HYT-68 Button type

Main Specification

Crimper range	1/4"-2" 4SP (6-51mm)
Voltage&motor	380V(4KW)/220V(3KW)
Opening without dies	114mm
Hydraulic oil box	40L(USE 32L)
Dies of quantity	10 sets
Systematic pressure	31.5MPa/26.5MPa
Largest pressure	500T
Quick change dies	Options
Optional accessories	Movable caster/Metal handle
Volume(LxWxH)	80x53xd7cm
Net weight	260KG(573lb)
Efficiency(reference)	200pcs/Hour



Electric, 2", 4S

DX-68 Button type

Main Specification

Crimper range	1/4"-2" 4SP (6-51mm)
Voltage&motor	380V(4KW)/220V(3KW)
Opening without di	114mm
Hydraulic oil box	40L(USE 32L)
Dies of quantity	10 sets
Systematic pressure	31.5MPa/26.5MPa
Largest pressure	400T
Quick change dies	Options
Optional accessorie	Movable caster/Metal handle
Volume(LxWxH)	80x53x87cm
Net weight	220KG(485lb)
Efficiency(reference)	200pcs/Hour



Electric, 2", 4S

HYT-51 Button type

Main Specification	
Crimper range	1/4"-2" 4SP (6-51mm)
Voltage&motor	380V(4KW)/220V(3KW)
Opening without dies	114mm
Hydraulic oil box	40L(USE 32L)
Dies of quantity	10 sets
Systematic pressure	31.5MPa/26.5MPa
Largest pressure	500T
Quick change dies	Options
Optional accessories	Movable caster/Metal handle
Volume(LxWxH)	79x60x94cm
Net weight	280KG(617lb)
Efficiency(reference)	200pcs/Hour



Electric, 2", 4S

HYT-51G Button type

Main Specification	
Crimper range	1/4"-2" 4SP (6-51mm)
Voltage&motor	380V(4KW)/220V(3KW)
Opening without dies	114mm
Hydraulic oil box	40L(USE 32L)
Dies of quantity	10 sets
Systematic pressure	31.5MPa/26.5MPa
Largest pressure	500T
Quick change dies	Options
Optional accessories	Metal handle
Volume(LxWxH)	90*69*141cm
Net weight	326KG(718lb)
Efficiency(reference)	200pcs/Hour



Electric, 2", 4S

HYT-51F Button type

Main Specification	
Crimper range	1/4"-2" 4SP (6-51mm)
Voltage&motor	380V(4KW)/220V(3KW)
Opening without dies	114mm
Hydraulic oil box	40L(USE 32L)
Dies of quantity	10 sets
Systematic pressure	31.5MPa/26.5MPa
Largest pressure	500T
Quick change dies	Options
Optional accessories	Metal handle
Volume(LxWxH)	90*69"141cm
Net weight	326KG(718lb)
Efficiency(reference)	200pcs/Hour



Electric, 2", 4S

HYT-51N CNC type

Main Specification	
Crimper range	1/4"-2" 4SP (6-51mm)
Voltage&motor	380V(4KW)/220V(3KW)
Opening without dies	114mm
Hydraulic oil box	40L(USE 32L)
Dies of quantity	10 sets
Systematic pressure	31.5MPa/26.5MPa
Largest pressure	500T
Quick change dies	Options
Optional accessories	Metal handle
Volume(LxWxH)	90x69x141cm
Net weight	326KG(718lb)
Efficiency(reference)	200pcs/Hour



Electric, 2", 6S

HYT-H91 CNC type

Main Specification	
Crimper range	1/4"-2" 6SP (6-51mm)
Voltage&motor	380V(4KW)/220V(3KW)
Opening without dies 122mm	
Hydraulic oil box	45L(USE 36L)
Dies of quantity	10 sets
Systematic pressure	32MPa
Largest pressure	640T
Quick change dies	Options
Optional accessories	Movable caster/Metal handle
Volume(LxWxH)	72x53x130cm
Net weight	295KG(650lb)
Efficiency(reference)	400pcs/Hour



Electric, 2", 6S

HYT-C91 CNC type

Main Specification	
Crimper range	1/4"-2" 4SP (6-51mm)
Voltage&motor	380V(4KW)/220V(3KW)
Hydraulic oil box	45L(USE 36L)
Dies of quantity	10 sets
Systematic pressure	30MPa
Quick change dies	Options
Optional accessories	Movable caster/Metal handle
Volume(LxWxH)	80x63x130cm
Net weight	310KG(683lb)
Efficiency(reference)	400pcs/Hour



Electric, 2.5", 6S

HYT-L91 CNC type

Main Specification	
Crimper range	1/4"to2-1/2" 4SP (6-64mm)
Voltage&motor	380V{4KW)/220V(3KW)
Opening without dies	134mm
Hydraulic oil box	65L(USE 60L)
Dies of quantity	11 sets
Systematic pressure	30MPa
Largest pressure	640T
Quick change dies	Options
Optional accessories	Movable caster/Metal handle
Volume(LxWxH)	80x64x140cm
Net weight	326KG(619lb)
Efficiency(reference)	400pcs/Hour



Electric, 2", 6S

HYT-B32 CNC type

Main Specification	
Crimper range	1/4"-2" 6SP (6-51mm)
Voltage&motor	380V(4KW)/220V(3KW)
Opening without dies	122mm
Hydraulic oil box	55L(USE 48L)
Dies of quantity	12 sets
Systematic pressure	32MPa
Largest pressure	520T
Quick change dies	Options
Optional accessories	Movable caster/Metal handle
Volume(LxWxH)	65x50x130cm
Net weight	250KG(551lb)
Efficiency(reference)	400pcs/Hour



Electric, Z*, 66

HYT-B61 Button/C61 CNC

Main Specification

Crimper range	1/4" - 2" 6S (6-51mm)
Voltage&motor	380V(4KW)/220V(2.2KW)
Opening without dies	120mm
Hydraulic oil box	100L(USE 90L)
Die size	@1"
Systematic pressure	31.5Mpa
Largest pressure	2000T
Quick change dies	Include
Optional accessories	Touch Screen
Volume(LxWxH)	88x76x85cm
Net weight	305KG(672lb)
Efficiency(reference)	400pcs/Hour



Electric, 2", 6S

HYT-S32 CNC

Main Specification

Crimper range	1/4" - 2" 6S (6-51mm)
Voltage&motor	380V(4KW)/220V(2.2KW)
Opening without dies	122mm
Hydraulic oil box	100L(USE 90L)
Dies of quantity	13 sets
Systematic pressure	31.5Mpa
Largest pressure	5600T
Quick change dies	Include
Optional accessories	Touch Screen
Volume(LxWxH)	65x50x130cm
Net weight	350KG(771lb)
Efficiency(reference)	400pcs/Hour



Electric, 1-2", 4S

HYT-51P Button type

Main Specification	
Crimper range	1/4"-2"(6-51mm)
Voltage&motor	380V{4KW}/220V(3KW)
Opening without dies	110mm
Hydraulic oil box	35L(USE 32L)
Dies of quantity	10 sets
Systematic pressure	30MPa
Largest pressure	490T
Quick change dies	Options
Optional accessories	Include
Volume(LxWxH)	95x63x70cm
Net weight	260KG(573lb)
Efficiency(reference)	200pcs/Hour



Electric, 1-1/2", 2S

HYT-32C Button type

Main Specification	
Crimper range	1/4"-1-1/2" 1&2S (6-38mm)
Voltage&motor	380V(4KW)/220V(3KW)
Opening without dies	110mm
Hydraulic oil box	35L(USE 32L)
Dies of quantity	8 sets
*ystematic pressure	30MPa
Largest pressure	490T
Quick change dies	Options
Optional accessories	Dies shelf(HYT-38C)
Volume(LxWxH)	95x63x70cm
Net weight	240KG(528lb)
Efficiency(reference)	200pcs/Hour



Electric, Steel pipe(falsework)

HYT-51K Button type

Main Specification	
Crimper range	25, 32mm
Voltage&motor	380V(4KW)/220V(3KW)
Opening without dies	114mm
Hydraulic oil box	40L(USE 32L)
Dies of quantity	3 sets
Systematic pressure	30MPa
Largest pressure	500T
Quick change dies	Options
Optional accessories	Movable caster/Metal hand
Volume(LxWxH)	67x49x78cm
Net weight	240KG(528lb)
Efficiency(reference)	200pcs/Hour



Manual, 1", 2S

HYT-25M

Main Specification	
Crimper range	1/8" -1" 2S (4-25mm)
Voltage&motor	Manual
Opening without dies	53mm
Hydraulic oil box	0.5L(USE 328ml)
Dies of quantity	7 sets
Systematic pressure	35MPa
Largest pressure	500T
Quick change dies	No
Optional accessories	No
Volume(LxWxH)	31x37x27cm
Net weight	30KG(66lb)
Efficiency(reference)	30pcs/Hour



Manual, 1-1/2", 4S

HYT-52M

Crimper range	1/8" -1-1/4" 4S (4-32mm)
---------------	--------------------------

Hydraulic oil box	1.5L(USE1.3L)D10 spindle c
-------------------	----------------------------

Dies of quantity	12 sets
------------------	---------

Largest pressure	137T
------------------	------

Optional accessories	No
----------------------	----

Net weight	80KG(176lb)
------------	-------------



Manual, 2", 4S

HYT-64M

Main Specification

Crimper range	1/8" -2" 4S (4-51mm)
---------------	----------------------

Voltage&motor	Manual
---------------	--------

Opening without dies	110mm
----------------------	-------

Hydraulic oil box	5L(USE 3L)
-------------------	------------

Dies of quantity	10 sets
------------------	---------

Systematic pressure	30MPa
---------------------	-------

Quick change dies	No
-------------------	----

Optional accessories	No
----------------------	----

Volume(LxWxH)	55x67x56cm
---------------	------------

Efficiency(reference)	10pcs/Hour
-----------------------	------------



Electric, 3", 6S

HYT-M91 CNC type

Main Specification	
Crimper range	1/4"-3" 4SP (6-76mm)
Voltage&motor	380V(4KW)/220V(3KW)
Opening without dies 168mm	
Hydraulic oil box	65L(USE 60L)
Systematic pressure	30MPa
Largest pressure	900T
Quick change dies	Options
Optional accessories	Movable caster/Metal handle
Volume(LxWxH)	80x64x140cm
Efficiency(reference)	400pcs/Hour



Electric, 4", 6S

HYT-120B, Button type

Main Specification	
Crimper range	1/4" -3" 6S (6-102mm)
Voltage&motor	380V(SKW)
Opening without dies 183mm	
Hydraulic oil box	80L(USE 65L)
Dies of quantity	13 sets
Systematic pressure	30MPa
Quick change dies	Optional (6-51)
Optional accessories	No
Volume(LxWxH)	91x59x121cm
Efficiency(reference)	200pcs/Hour



Electric, 4", 6S

HYT-D91, CNC type

Main Specification	
Crimper range	1/4" -4" 6S (6-102mm)
Voltage&motor	380V/5.5kw
Opening without dies	220mm
Hydraulic oil box	80L(USE 70L)
Dies of quantity	18 sets
Systematic pressure	30MPa
Largest pressure	1500T
Ctuick change dies	No
Optional accessories	No
Volume(LxWxH)	110x73x112cm
Net weight	900KG(1984lb)
Efficiency(reference)	300pcs/Hour



Electric, 4", 6S

HYT-A60, CNC type

Main Specification	
Crimper range	2" -4" 6S (6-102mm)
Voltage&motor	380V/5.5kw
Opening without dies	220mm
Hydraulic oil box	80L(USE 70L)
Dies of quantity	10 sets
Systematic pressure	30MPa
Largest pressure	1500T
Quick change dies	No
Optional accessories	No
Volume(LxWxH)	110x70x120cm
Net weight	980KG(2160lb)
Efficiency(reference)	300pcs/Hour



Electric, 6", 6S

HYT-150L, Button type

Main Specification	
Crimper range	1/4" -6" 6S (6-153mm)
Voltage&motor	380V/4KW(5.5kw)
Opening without dies	235mm
Hydraulic oil box	160L
Dies of quantity	20 sets
Systematic pressure	31.5
Largest pressure	2500T
Quick change dies	Optional (6-51)
Optional accessories	No
Volume(LxWxH)	91x59x121cm
Net weight	850KG(1874lb)
Efficiency(reference)	200pcs/Hour



Electric, 6", 6S

HYT-H150, Button type

Main Specification	
Crimper range	3" -6" 6S (76-153mm)
Voltage&motor	380V/5.5kw
Opening without dies	270mm
Hydraulic oil box	180L(USE 170L)
Dies of quantity	4 sets
Systematic pressure	31MPA
Largest pressure	1966T
Quick change dies	No
Optional accessories	No
Volume(LxWxH)	142x90x100cm
Net weight	1080KG(2381lb)
Efficiency(reference)	150pcs/Hour



Electric, 8-14", 6S

HYT-K91, Button type

Main Specification	
Crimper range	8" - 14" 6S (200-350mm)
Voltage&motor	380V(5.5KW)
Opening without dies	450mm
Hydraulic oil box	180L(USE 170L)
Dies of quantity	2 sets
Systematic pressure	25MPa
Largest pressure	2000T
Quick change dies	No
Optional accessories	No
Volume(LxWxH)	145x90x105cm
Net weight	1450KG(528lb)
Efficiency(reference)	200pcs/Hour



Electric, 2", 6S

HYT-56C(CNC)/56B(Button)

Main Specification	
Crimper range	1/4" -2" 6S (6-51mm)
Voltage&motor	380V(4KW)
Opening without dies	145mm
Hydraulic oil box	100L(USE 90L)
Dies of quantity	13 sets
Systematic pressure	31.5Mpa
Largest pressure	1000T
Quick change dies	optional
Optional accessories	CNC, Touch Screen
Volume(LxWxH)	80x70x145cm
Net weight	850KG(1874lb)
Efficiency(reference)	300pcs/Hour



Electric, 3", 4S

HYT-76A(CNC)/76B(Button)

Main Specification	
Crimper range	1/4" - 3" 6S (6-76mm)
Voltage&motor	380V(5.5KW)
Opening without dies	158mm
Hydraulic oil box	100L(USE 90L)
Dies of quantity	15 sets
Systematic pressure	31.5MPa
Largest pressure	1500T
Quick change dies	No
Optional accessories	CNC, Touch Screen
Volume(LxWxH)	100x80x163mm
Net weight	1250KG(528lb)
Efficiency(reference)	300pcs/Hour



Electric, 2", 6S

HYT-B81, Touch screen

Main Specification	
Crimper range	1/4" - 2" 6S (6-51mm)
Voltage&motor	380V(4KW)
Opening without die	155mm
Hydraulic oil box	100L(USE 90L)
Dies of quantity	10 sets
Systematic pressure	30MPa
Largest pressure	1500T
Quick change dies	Include
Optional accessories	Metal handle
Volume(LxWxH)	78x71x140cm
Net weight	730KG(1609lb)
Efficiency(reference)	300pcs/Hour



Electric, 10", 4S

HVT-K81 Touch #screen

Main Specfication

Crimper range	2"-10" (51-254mm)
Voltage&motor	380V(15KW)/220V(15KW)
Opening without dies	380mm
Hydraulic oil box	3fXIL(USE 280L)
Dies of quantity	2 sets
Systematic pressure	31.5Mpa
Largest pressure	2000T
Quick change dies	Without
Optional accessories	CNC
Volume(LxWxH)	160x48x195cm
Net weight	3400KG(7495000lb)
Efficiency(reference)	200pcs/Hour



Electric, 10", 4S

NYT-OOC Touch #screen

Main Specfication

Crimper range	2"-10" (51-254mm)
Voltage&motor	380V(11KW)/220V(11KW)
Opening without dies	450mm
Hydraulic oil box	3AIL(USE 280L)
Dies of quantity	5 sets
Systematic pressure	31.5Mpa
Largest pressure	2000T
Quick change dies	Without
Optional accessories	CNC
Volume(LxWxLI)	280x48x195cm
Net weight	4750KG
Efficiency(reference)	2&ipcs/flour



Electric, 1-1/4", 2S

HYT-A83, CNC type

Main Specification

Crimper range	1/4" -1-1/4" (6-32mm)
Voltage&motor	380V(4KW)
Opening without dies	52mm
Hydraulic oil box	40L(USE32L)
Dies of quantity	4 sets
Systematic pressure	30MPa
Largest pressure	300T
Quick change dies	Include
Optional accessories	Metal handle
Volume(LxWxH)	66x63x97cm
Net weight	480KG(1058lb)
Efficiency(reference)	300pcs/Hour



Electric, 2", 6S

HYT-A85, Touch screen

Main Specification

Crimper range	1/4" -2" 4S (6-51mm)
Voltage&motor	380V(4KW)
Side opening	>=80mm
Hydraulic oil box	100L(USE90L)
Dies of quantity	10 sets
Systematic pressure	30MPa
Largest pressure	1500T
Quick change dies	Include
Optional accessories	Metal handle
Volume(LxWxH)	81x67x160cm
Net weight	1110KG(528lb)
Efficiency(reference)	300pcs/Hour



Electric, 2", 6S

HYT-A81, Touch screen

Main Specification

Crimper range	1/4" -2" 4S (6-51mm)
Voltage&motor	380V(4KW)
Opening without dies	155mm
Hydraulic oil box	60L(USE 50L)
Dies of quantity	10 sets
Systematic pressure	30MPa
Largest pressure	1500T
Quick change dies	Include
Optional accessories	Metal handle/tricolor light
Volume(LxWxH)	79x58x95cm
Net weight	560KG(1234lb)
Efficiency(reference)	300pcs/Hour



Electric, 2", 4S

HYT-C103, CNC type

Main Specification

Crimper range	1/4" -2" (6-51mm)
Voltage&motor	380V(3KW)
Opening without dies	122mm
Hydraulic oil box	50L(USE40L)
Dies of quantity	10 sets
Systematic pressure	30MPa
Largest pressure	600T
Quick change dies	Include
Optional accessories	CNC
Volume(LxWxH)	75x60x127cm
Net weight	480KG(1058lb)
Efficiency(reference)	300pcs/Hour



Electric, Nut/Ferrule type

HYT-52N, Button type

Crimper range	1/4" -2" (5-51mm)
Voltage&motor	380V(3KW)
Dies of quantity	10 sets
Systematic pressure	26MPa
Optional accessories	Button
Hydraulic oil box	50L(USE40L)
Largest pressure	600T
Volume(LxWxH)	99x80x105cm
Net weight	270KG(595lb)
Efficiency(reference)	800 pcs/Hour



Electric, Nut/Ferrule type

HYT-N52, CNC

Crimper range	1/4" -2" (5-51mm)
Voltage&motor	380V(3KW)
Dies of quantity	10 sets
Systematic pressure	26MPa
Optional accessories	CNC
Hydraulic oil box	50L(USE40L)
Largest pressure	600T
Volume(LxWxH)	80x70x85cm
Net weight	270KG(595lb)
Efficiency(reference)	800 pcs/Hour

12V/24V (Battery of truck)



HYT-C12, Button type	
Cutting range	1 4" -2" 4S 6-51mm
Accuracy	Manual
Revolutions/Minute	300Dr/m
Voltage&motor	12V .6KW)/ 24V
Dies of quantity	saw blade 1pcs
Volume(LxWxH)	6 62x52cm
Net weight	75KG(1651b
Efficiency(reference)	500pcs/Hour



HYT-512, Button type	
Skiving range	1/4" -2" 4S(6-5 m)
Voltage&motor	12a(400W) / 24)
Accuracy	Manual
Revolutions/Minute	170r/m
Dies of quantity	10 sets
Volume{LxWxH}	60×62×66cm
Net weight	42K (93 b)
Efficiency(reference)	S00pcs/Hour



HYT-12V, Button type	
Crimper range	1/4" -2" 4S (6-S1mm)
Voltage&motor	12V(3.6KW) (24v)
Opening without dies	114mm
Hydraulic oil box	4L(USE3.SL)
Dies of quantity	10 sets
Systematic pressure	30MPa
Largest pressure	ROOT
Quick change dies	Options
Volume(LxWxH)	65x60x60cm
Net weight	¥80KC(3961b)
Efficiency(reference)	80pcs/Hour

Multifunction series

Skiving machine




Cutting & Skiving	HYT-B201
Cutting range	1/4"-2" 4SP (6-51mm)
Skiving range	1/4"-2" 4SP (6-51mm)
Dies of quantity	10 sets
Voltage&motor	380V(4KW)/220V(3KW)
Blade diameter	300mm
Blade quantity	1 pcs
Skiving knife	1 pcs
Volume(LxWxH)	85x60x 124cm
Net weight	150KG(330lb)
Efficiency(reference)	500pcs/Hour




Crimping & Skiving	HYT-A53
Crimping range	1/4"-2" 4SP (6-51mm)
Skiving machine	1/4"-2" 4SP (6-51mm)
Dies of quantity	20 sets
Systematic pressure	30MPa
Largest pressure	500T
Quick change dies	Options
Voltage&motor	380V(4KW)/220V(3KW)
Volume(LxWxH)	97x49x78cm
Net weight	240KG(529lb)
Efficiency(reference)	200pcs/Hour

HYT-K52

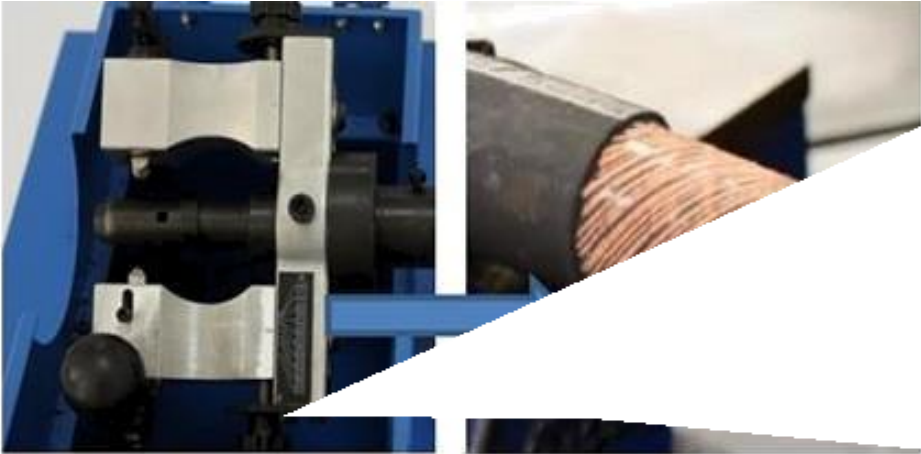

HYT—BB51

HYT—K5 1

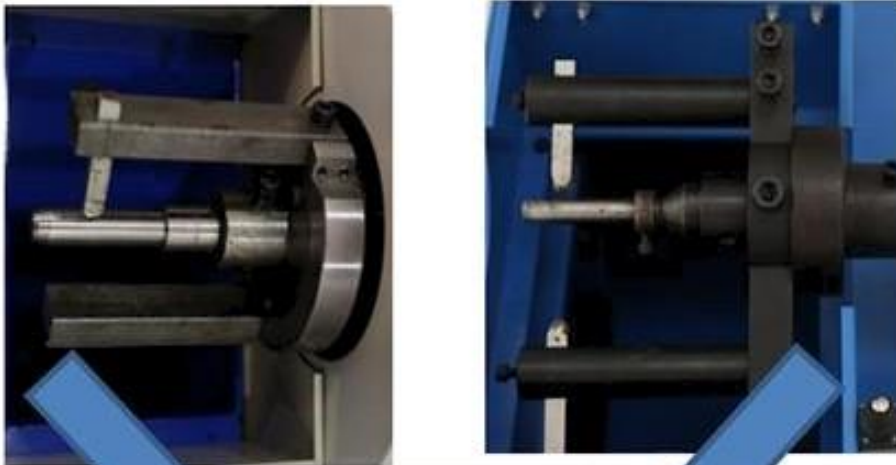



Outside skiving

HYT-B51 Manual type

Main Specification	
Skiving range	1/4"-2" 4SP (6-51mm)
Voltage&motor	380V{3KW}/220V(2.2KW)
Revolutions/Minute	190 r/min
Internal skiving	No include
Dies of quantity	10 sets
Safety protections	No include
Waste containers	Include
Optional accessories	Mandrel diesels/Metal handIE'
Volume(LxWxH)	60x58x110cm
Net weight	75KG(165 b)
Efficiency(reference)	600pcs/Hour



Outside skiving

HYT-B55 Manual type

Main Specification	
Skiving range	1/4"-2" 4SP (6-51mm)
Voltage&motor	380V(3KW)/220V(2.2KW)
Revolutions/Minute	190 r/min
Internal skiving	No include
Dies of quantity	10 sets
Safety protections	No include
Waste containers	Include
Optional accessories	MandrE'l diesE'ts/Metal handlR
Volume(LxWxH)	60x58x110cm
Net weight	55KG(198 b)
Efficiency(reference)	600pcs/Hour



inside&outside skiving

HYT-K51 Manual type

Main Specification	
Skiving range	1/4"-2" 4SP (6-51mm)
Voltage&motor	380V{3KW}/220V(2.2KW)
Internal skiving	Include
Dies of quantity	10 sets
Safety protections	Include
Optional accessories	Mandrel diesE'ts/Metal handleE'
Volume(LxWxH)	58x57x110cm
Net weight	60KG(312 b)
Efficiency(reference)	600pcs/Hour



inside&outside skiving

HYT-K52 Elasticity type

Main Specification	
Skiving range	1/4"-2" 4SP (6-51mm)
Voltage&motor	380V(3KW)/220V(2.2KW)
Revolutions/Minute	284 r/min
Internal skiving	Include
Dies of quantity	10 sets
Safety protections	Include
Waste containers	Include
Optional accessories	MandrE'l diesets/Metal handle
Volume(LxWxH)	60x58x120mm
Net weight	64KG(141lb)
Efficiency(reference)	600pcs/Hour




inside&outside skiving

HYT-K50 Manual type

Main Specification	
Skiving range	1/4"-2" 4SP (6-51mm)
Voltage&motor	No
Revolutions/Minute	No
Internal skiving	No
Dies of quantity	10 sets
Safety protections	No
Waste containers	No
Optional accessories	No
Volume(LxWxH)	30x30x300mm
Net weight	15KG(33lb)
Efficiency(reference)	50pcs/Hour

Cutting machine



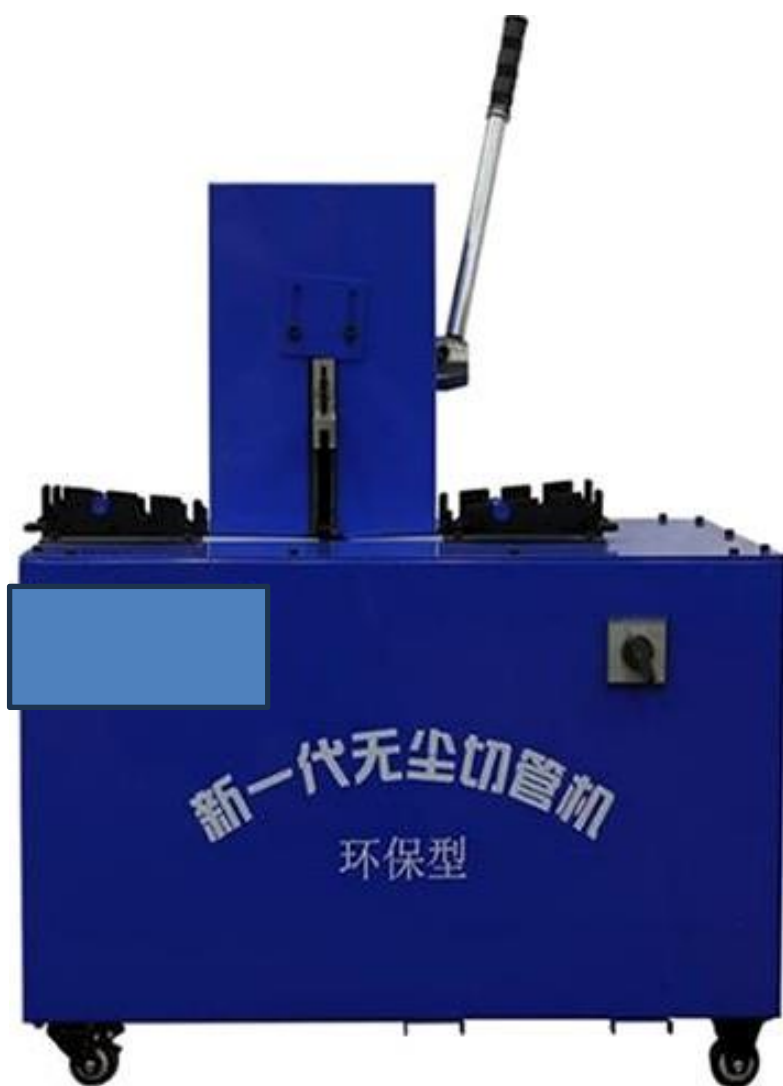

Electric, 2" 4S

HYT-303B Manual type

Main Specification	
Cutting range	1/4"-2" 4SP (6-51mm)
Voltage&motor	380V(3KW)/220V(2.2KW)
Revolutions/Minute	2900 r/min
Max diameters	90 mm
Blade of quantity	1 sets
Blade of diameter	300 mm
Dust collector	Include
Optional accessories	110V - 415V 50HZ/60HZ
Volume(LxWxH)	70x85x100cm
Net weight	98KG(21lb)
Efficiency(reference)	1500pcs/Hour



Electric, 2" 4S

HYT-300 Manual type

Main Specification	
Cutting range	1/4"-2" 4SP (6-51mm)
Voltage&motor	380V(3KW)/220V(2.2KW)
Revolutions/Minute	2900 r/min
Max diameters	90 mm
Blade of quantity	1 sets
Blade of diameter	300 mm
Dust collector	No include
Optional accessories	110V - 415V 50HZ/60HZ
Volume(LxWxH)	64x48x48cm
Net weight	55KG(121 b)
Efficiency(reference)	1200pcs/Hour



Electric, 2" 4S

HYT-305 Pedal type

Main Specification	
Cutting range	1/4"-2" 4SP (6-51mm)
Voltage&motor	380V(3KW)/220V(4KW)
Revolutions/Minute	2900 r/min
Max diameters	90 mm
Blade of quantity	1 sets
Blade of diameter	350x2.8mm
Optional accessories	110V - 415V 50HZ/60HZ
Volume(LxWxH)	79x58x106cm
Net weight	115KG(254 b)



Electric, 2" 4S

HYT-306 Pneumatic type

Main Specification	
Cutting range	1/4"-2" 4SP (6-51mm)
Voltage&motor	380V(3KW)/220V(4KW)
Revolutions/Minute	2900 r/min
Max diameters	90 mm
Blade of quantity	1 sets
Blade of diameter	350x2.8mm
Dust collector	Include
Optional accessories	110V - 415V 50HZ/60HZ
Volume(LxWxH)	79x58x116cm
Net weight	135KG(297 b)
Efficiency(reference)	1500pcs/Hour



Electric, 2" 4S

HYT-350B Pneumatic type

Main Specification	
Cutting range	1/4"-2" 4SP (6-51mm)
Voltage&motor	380V(3KW)/220V(2.2KW)
Revolutions/Minute	2900 r/min
Max diameters	100 mm
Blade of quantity	1 sets
Blade of diameter	350 mm
Suction connection	Include
Optional accessories	110V - 415V 50HZ/60HZ
Volume(LxWxH)	81x63x130cm
Net weight	180KG(396 b)
Efficiency(reference)	2500pcs/Hour



Electric, 3" 4S

HYT-B520 Pneumatic type

Main Specification	
Cutting range	1/4"-3" 4SP (6-51mm)
Voltage&motor	380V(7.5KW)
Revolutions/Minute	2900 r/min
Max diameters	150 mm
Pneumatic input	0.8 MPA
Blade of diameter	520 mm
Suction connection	Include
Optional accessories	110V - 415V 50HZ/60HZ
Volume(LxWxH)	90x70x160cm
Net weight	380KG(8371b)
Efficiency(reference)	2500pcs/Hour



Electric, 3" 4S

HYT-405B Pneumatic type

Main Specification	
Cutting range	1/4"-3" 4SP (6-51mm)
Voltage&motor	380V{4KW}
Revolutions/Minute	2900 r/min
Max diameters	120 mm
Pneumatic input	0.8 MPA
Blade of diameter	620 mm
Suction connection	Include
Optional accessories	110V - 415V 50HZ/60HZ
Volume (LxWxH)	95x86x110mm
Net weight	145KG(528 b)
Efficiency(reference)	2500pcs/Hour



Pressure testing

Hydraulic hose testing

pressure machine





Pressure testing

T150 / T250

Main Specification	
Static pressure	150MPa/250MPa
Min starting pressure	20MPa/30MPa
Pressure control	Semi-auto
Type of drive	P+S
Pressure discharge	Manual
Water tank	SOL
Volume (LxWxH)	21x85x126cm
Weight	190Kg(419 b)
Door of safety device	Yes
Delivery filter	Include



Assembly machine

Hydraulic hose fitting assembly machine

HYT-AF50

Main Specification	
Install size	1/4''to 2'
Pneumatic input	0.8MPa
Weight	85Kg(187 b)
Volume (LxWxH)	78x50x110cm

Options Part

Quick change dies&tool



Crimp show/Customize dies



Operation : Button type



Operation : CNC type



Operation: Touchscreen type



Motor
3KW



4KW



COJOF

